



Mille-Plug™



The best Plasterboard/Wallboard fixing available on the market today.
Use for sciew sizes 4-10. Also excellent for soft Aircrete (AAC) Block.

General Overview

An excellent and strong fixing for Plasterboard/Wallboard.
Great for use in Aircrete (AAC) with density less than 400kg/m³.
Designed to take a wider range of screw sizes than any other fixing on the market!

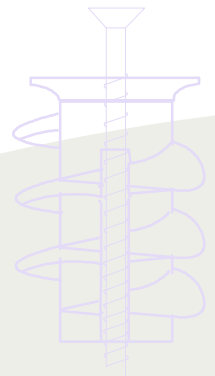

Pull Out Tolerances/Safe Working Loads


The safe working loads have been calculated with a safety factor of x5:

	Thickness	Pull Out Resistance Straight Line	Shear Resistance with force exerted at 90°
Plasterboard	10mm (0.4 inch)	5.5kg (12lb)	18.6kg (41lb)
Plasterboard	13mm (0.5 inch)	7.3kg (16lb)	23.6kg (52lb)
Plasterboard	Laminated	15.4kg (34lb)	49.5kg (109lb)

Applications

Fixing could not be easier just simply make a hole in your plasterboard with a No.2 recessed screwdriver or 6mm (¼ inch) drill and screw the Mille-Plug home.

The Mille-Plug can be used in soft Aircrete blocks (with density lower than 4.0kg/m³). Make a hole with a 6mm (¼ inch) drill or No.2 recessed screwdriver and simply screw the Mille-Plug in.

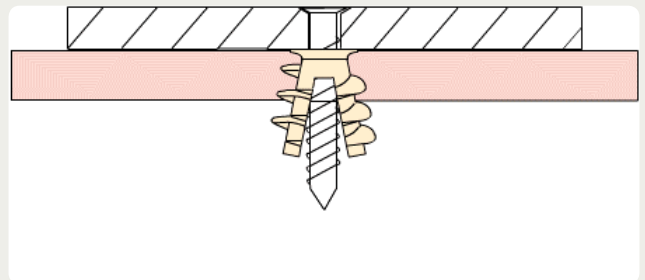

Key Benefits

- Easily fixed into plasterboard.
- Takes a size 4-10 gauge screw.
- Superb pull out tolerances.
- Use also in soft Aircrete (AAC) block.



Product Code	EAN Code	Description	Pack Size	Packs per Outer Case
MPBM-NT100-BS-11	5060029110307	Mille-Plug (Universal Drywall Plug)	100	48